

# CENTURIES AHEAD



**CENTURYPLY**®



# A CENTURY IN 35 YEARS


It takes years to become the best. And centuries to sustain it. Over the last 35 years, **CenturyPly**, the pioneers in plywood manufacturing has now become India's leading lifestyle brand offering the best in wood furnishing solutions. Which means the work of a century in this short span.

Established in Kolkata, and growing from humble beginnings, today **CenturyPly** is India's leading plywood brand with consolidated operations across the country. Building on **35 years** of industry experience and trust, we have continuously added to our value chain, while striving to serve our customers better.


**CenturyPly** always believes in continuous innovation. One such innovation was to tackle counterfeit sellers effectively. We have designed the CenturyPromise app that can help you verify the originality of the products you've purchased in seconds. Using the unique QR code that is imprinted on each and every product.

The revolutionary Firewall Technology from the house of **CenturyPly** enables select ranges of **CenturyPly** to be the best fire-fighting plywood available in India. It has been certified as the best in class to fight fire accidents and has some key properties that can be beneficial in the unfortunate event of a fire accident. It is available at no extra cost.

This is the kind of thoughtful innovation which drives the company ahead of competition all these years and will drive our company for decades to come.

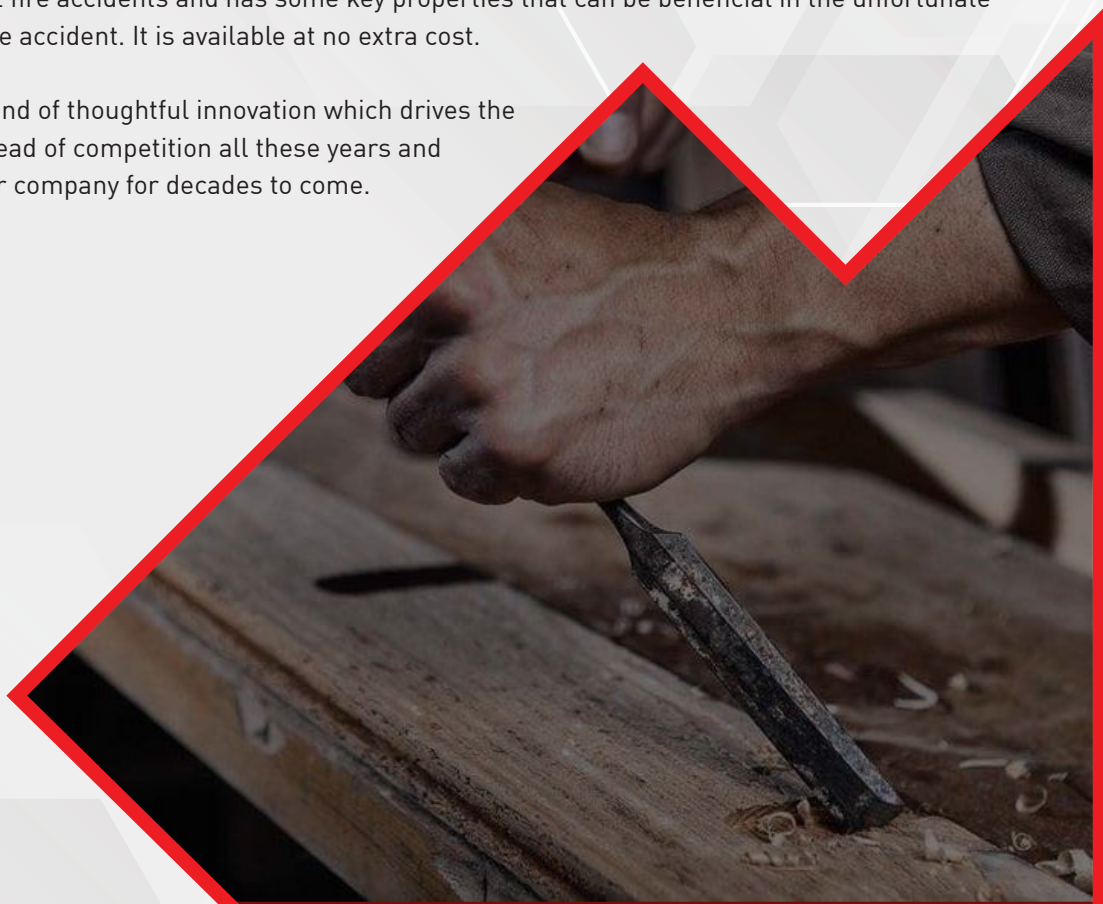

# THE STORY SO FAR

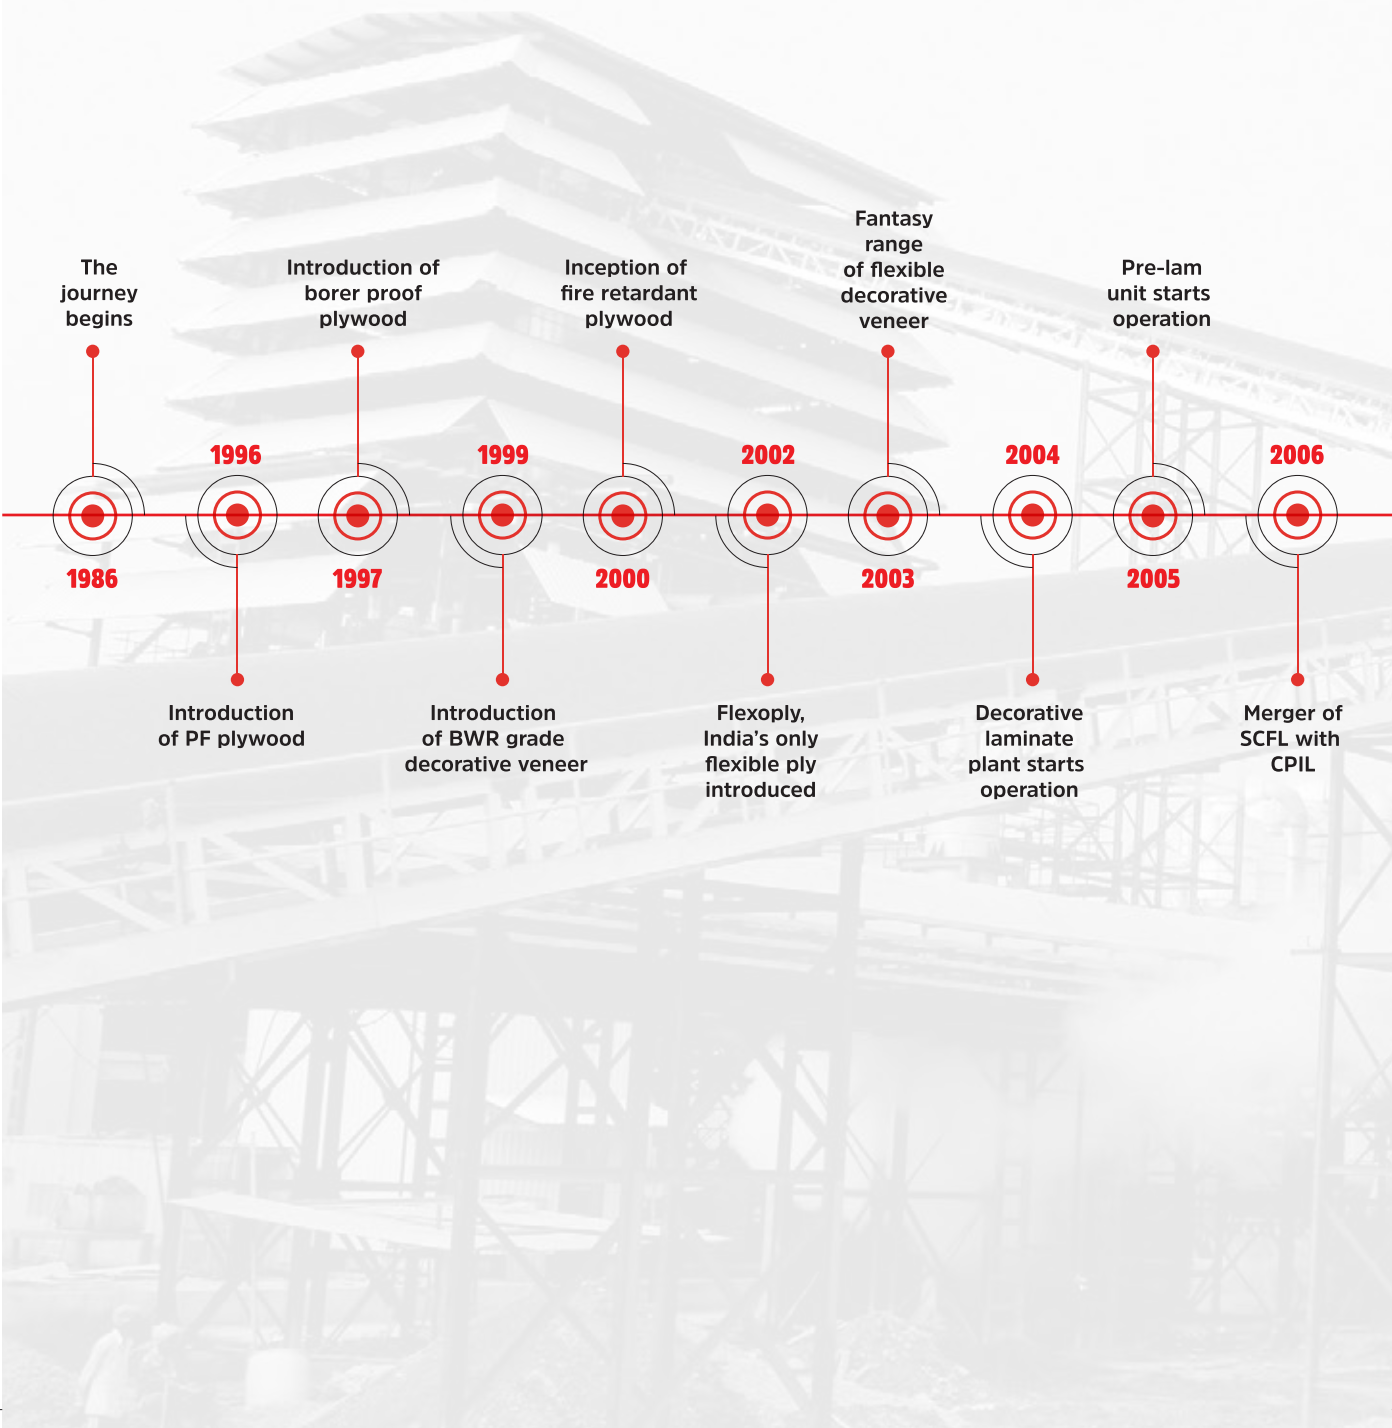

The journey begins

1986

Introduction of borer proof plywood

1996

Introduction of PF plywood

1997

Inception of fire retardant plywood

1999

Introduction of BWR grade decorative veneer

2000

Fantasy range of flexible decorative veneer

2002

Flexoply, India's only flexible ply introduced

2003

Pre-lam unit starts operation


2004

Decorative laminate plant starts operation

2005

2006

Merger of SCFL with CPIL

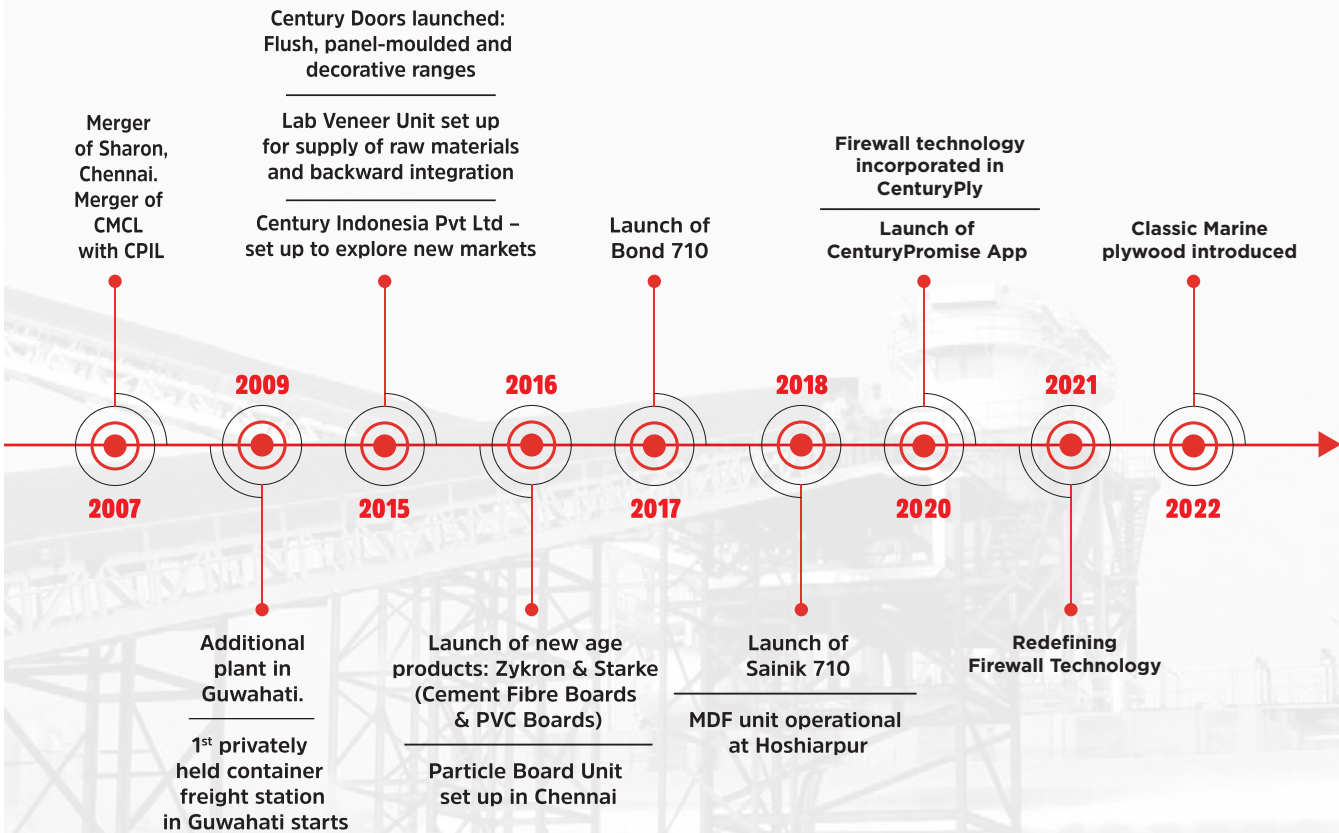





**ARCHITECT PLY**  
TRULY EVERLASTING

  
**CENTURYPLY**  
CLUB PRIME

  
**CENTURYPLY**  
CLASSIC MARINE

  
**CENTURYPLY**  
BOND 710

  
**CENTURYPLY**  
WIN MR

**SAINIK 710**  
WATERPROOF PLY

**SAINIK MR**  
WATER RESISTANT PLY

  
**CENTURYPLY**  
IS:710 MARINE

  
**CENTURYPLY**  
FILM FACE PLYWOOD

# CENTURY PLYWOOD

When it comes to plywood, CenturyPly is by far the undisputed leader with a plethora of award-winning as well as innovative products designed specifically for our customers.

Our plywood is warp resistant, matching international standards of manufacturing, while our unique GLP formula makes it borer and termite proof.



# A LIFE OF LUXURY DEMANDS THE PERFECT SETTING

*ArchitectPly from CenturyPly.  
With lifetime warranty.*

ARCHITECT PLY

TRULY EVERLASTING



**FIREWALL**  
TECHNOLOGY

Now With

**VIROKILL**

Kills 99.99% Viruses

LIFETIME WARRANTY

**4 TIMES**

— MONEY BACK PROMISE —



Architect Ply, a premium plywood from the house of CenturyPly, now comes with absolute fire-retardant properties. It is made from exclusive hardwood species bonded with BWP synthetic resin. Also, clubbed with the revolutionary GLP (Glue Line Protection) technology, it's 100% borer and termite proof.

- IS: 710-BWP grade
- Two tier treatment-GLP and ACC
- E0 emission complaint
- Calibrated for uniform thickness
- Lifetime warranty\*
- Borer and termite proof with a lifetime warranty
- Absolute fire-retardant properties in accordance with ASTM E-84
- Green building certified
- Anti fungal property
- Gurjan face
- Fully composed core for zero gaps or overlaps
- Calibrated

\*Check the Warranty Terms & Conditions



## TECHNICAL SPECIFICATIONS\*

|                               |  |   |  |
|-------------------------------|--|---|--|
| Adhesive                      |  BWP grade synthetic resin  | Gap, Split, Overlap, Warp   |  Negligible  |
| Moisture Content (%)          |  8 - 12   | Warranty  |  Cost of furniture or 4 times the ply cost, whichever is lower |
| Glue Shear Strength (GSS) (N) |  > 1450   | Pre-pressing  |  Flat panel/balanced surface                                   |
| GSS Wet Test (N)              |  > 1200   | Face Thickness  |  Thicker face  |
| GSS Mycological Test (N)      |  > 1200   | Veneer to Veneer Ratio  |  As per standards  |
| Preservative Treatment        |  Two Tier Treatment:<br>1. Glue Line Protection (GLP)<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) | Static Bending Strength (N/mm <sup>2</sup> )                          |  > 60<br>> 50  |
| Specific Gravity              |  Approx. 0.75   | Modulus of rupture (MOR):<br>Along the grain:<br>Across the grain:    |  |
| Water Absorption (%)          |  < 5  | Modulus of elasticity (MOE):<br>Along the grain:<br>Across the grain: |  |

\*Conditions apply

# LASTING PEACE OF MIND.


CenturyPly Club Prime. India's most trusted plywood.



**CENTURYPLY**<sup>®</sup>  
**CLUB PRIME**



**BORER &  
TERMITE PROOF**



**BOILING  
WATER PROOF**



**SUPERIOR  
STRENGTH**



**FIREWALL**  
TECHNOLOGY

Now With  
**VIROKILL**  
Kills 99.99% Viruses

Club Prime is a 'Boiling Water Proof' plywood from CenturyPly, made by a special pre-pressing technique that ensures equal distribution of moisture and adhesive. The first in class BWP plywood with fire retardant properties.

- A unique GLP formula is used to make the plywood borer and termite proof
- Boiling Water Proof (IS 710 BWP Grade)
- 30-Year Warranty\*
- Multi-pressing technology for enhanced properties
- Only plywood in the industry which passes 25 stringent in-house tests
- 100% fire retardant
- Confirming to ASTM (American society for testing and materials) and conforming to British standard
- Green building certified
- Duplicate proof
- 100% Hard wood
- 100% Composed Core for Gapless Product
- Calibrated

\*Check the Warranty Terms & Conditions



## TECHNICAL SPECIFICATIONS\*

### PLYWOOD

|  |        |  |
|--|--------|--|
| Moisture Content (%)                             |        | 8 - 12   |
| Preservative Treatment                           |        | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Adhesion of plies                                |        | Excellent  |
| Specific Gravity                                 |        | > 0.69   |
| Screw holding strength (Kgf)                     |        | > 150  |
| Nail holding strength (Kgf)                      |        | > 120  |
| Static Bending Strength (N/mm <sup>2</sup> )     |        |  |
| Modulus of rupture (MOR):<br>Along the grain:    |        | > 40   |
| Across the grain:                                |        | > 55   |
| Modulus of elasticity (MOE):<br>Along the grain: |        | > 5000   |
| Across the grain:                                | > 6000 |  |

### BLOCKBOARD

|  |  |           |
|--|--|-----------|
| Moisture Content (%)                             |  | 8 - 12    |
| Preservative Treatment                           |  |           |
| Adhesion of plies                                |  | Excellent |
| Specific Gravity                                 |  | > 0.54    |
| Screw holding strength (Kgf)                     |  | > 120     |
| Nail holding strength (Kgf)                      |  | > 70      |
| Static Bending Strength (N/mm <sup>2</sup> )     |  |           |
| Modulus of rupture (MOR):<br>Along the grain:    |  | > 50      |
| Modulus of elasticity (MOE):<br>Along the grain: |  | > 5000    |



# CLASSIC MARINE

*Ply Nahin, Multi*ply.

ONE PLY. MULTIPLE BENEFITS.

**BORER & TERMITE  
PROOF**

**25-YEAR  
WARRANTY**

**VIRUS PROOF WITH  
VIROKILL TECHNOLOGY**

**BOILING WATER  
PROOF**

**FAKE PROOF WITH  
CENTURY PROMISE**


**ANTI-FUNGAL**



Classic Marine is an innovative product from the house of Centuryply that comes with 25 years of warranty, targeting the premium economy segment. It boasts an array of features. Its patented GLP technology offers superior defence against borers and termites, thus making it borer and termite proof. Classic Marine uses Quadrapress Technology in its construction process that enhances performance tolerance. Additionally, it is also virus and fungus proof.

- Glue line protection
- Anti-fungal treated
- Virus proof with Virokill technology
- Borer and Termite Proof
- 25 years warranty

\*Check the Warranty Terms & Conditions



## TECHNICAL SPECIFICATIONS\*

### PLYWOOD

|   |  |  |
|---|--|--|
| Moisture Content (%)  |  | 7 - 10   |
| Preservative Treatment  |  | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Adhesion of plies   |  | Excellent  |
| Specific Gravity  |  | > 0.68   |
| Water Absorption (%)  |  | < 5  |
| Screw holding strength (Kgf)  |  | > 130  |
| Nail holding strength (Kgf)   |  | > 110  |
| Static Bending Strength (N/mm <sup>2</sup> )                          |  | Modulus of rupture (MOR):<br>Along the grain: > 40<br>Across the grain: > 55   |
| Modulus of elasticity (MOE):<br>Along the grain:<br>Across the grain: |  | > 5000<br>> 6000   |

### BLOCKBOARD

|  |  |  |
|--|--|--|
| Moisture Content (%)                             |  | 8 - 12   |
| Modulus of Elasticity (N\mm <sup>2</sup> )       |  | > 5500   |
| Modulus of Rupture (N\mm <sup>2</sup> )          |  | > 55   |
| Preservative Treatment                           |  | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Adhesion of plies                                |  | Excellent  |
| Specific Gravity                                 |  | > 0.52   |
| Screw holding strength (Kgf)                     |  | > 110  |
| Nail holding strength (Kgf)                      |  | > 70   |
| Static Bending Strength (N/mm <sup>2</sup> )     |  | Modulus of rupture (MOR):<br>Along the grain: > 50   |
| Modulus of elasticity (MOE):<br>Along the grain: |  | > 5000   |

\*Conditions apply

**THE BOND WITHIN  
MAKES YOU STRONG**

**SOLID HAI**



**CENTURY PLY<sup>®</sup>**  
**BOND 710**

Now With

**VIROKILL**

**Kills 99.99% Viruses**

**21** TWENTY ONE YEAR  
WARRANTY



100% BORER &  
TERMITE PROOF



BOILING  
WATER PROOF

**Bond 710** is a special BWP Marine Grade plywood, developed to be borer and termite proof and meet all the parameters of IS:710.

- Unique GLP formula to make plywood borer and termite proof
- 21-Year Warranty\*
- More number of plies for more strength
- Quadra Press Technology for high strength
- Manufactured with surface calibration process for smooth surface finish
- Green Building certified

\*Check the Warranty Terms & Conditions



## TECHNICAL SPECIFICATIONS\*


### PLYWOOD

|  |  |  |
|--|--|--|
| Moisture Content (%)                             |  | 7 - 10   |
| Preservative Treatment                           |  | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Adhesion of plies                                |  | Excellent  |
| Specific Gravity                                 |  | > 0.68   |
| Water Absorption (%)                             |  | < 5  |
| Screw holding strength (Kgf)                     |  | > 130  |
| Nail holding strength (Kgf)                      |  | > 110  |
| Static Bending Strength (N/mm <sup>2</sup> )     |  | Modulus of rupture (MOR):<br>Along the grain: > 40<br>Across the grain: > 55   |
| Modulus of elasticity (MOE):<br>Along the grain: |  | > 5000   |
| Across the grain:                                |  | > 6000   |

### BLOCKBOARD

|  |  |  |
|--|--|--|
| Moisture Content (%)                             |  | 8 - 12   |
| Modulus of Elasticity (N\mm <sup>2</sup> )       |  | > 5500   |
| Modulus of Rupture (N\mm <sup>2</sup> )          |  | > 55   |
| Preservative Treatment                           |  | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Adhesion of plies                                |  | Excellent  |
| Specific Gravity                                 |  | > 0.52   |
| Screw holding strength (Kgf)                     |  | > 110  |
| Nail holding strength (Kgf)                      |  | > 70   |
| Static Bending Strength (N/mm <sup>2</sup> )     |  | Modulus of rupture (MOR):<br>Along the grain: > 50   |
| Modulus of elasticity (MOE):<br>Along the grain: |  | > 5000   |

\*Conditions apply

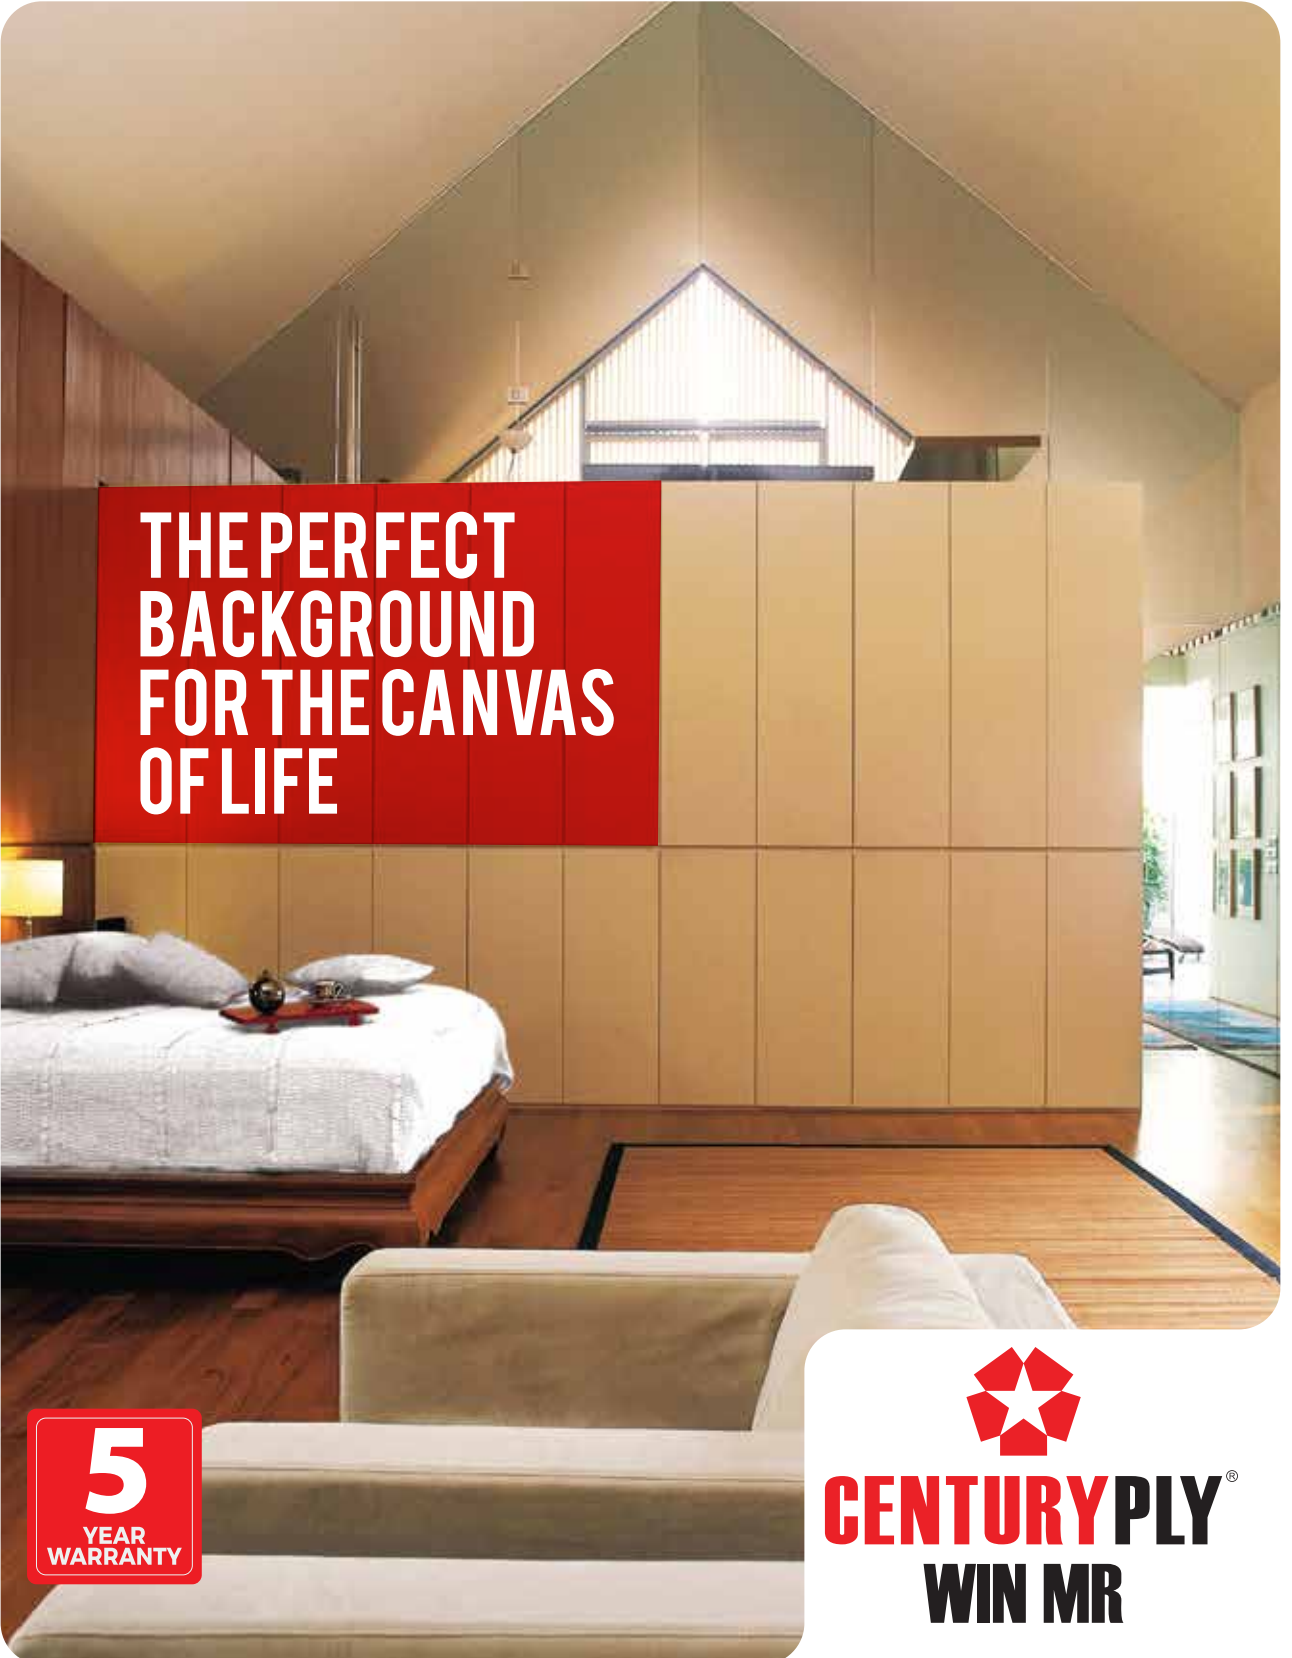

**THE PERFECT  
BACKGROUND  
FOR THE CANVAS  
OF LIFE**

**5**  
YEAR  
WARRANTY

  
**CENTURYPLY®**  
**WIN MR**



WIN MR- Few brands of commercial ply in India match up to CenturyPly MR Grade plywood. Made from imported seasoned hardwood and bonded with urea melamine formaldehyde under computer controlled temperature and pressure, they offer advantages almost at par with BWR grade wood panels, but at a much lesser cost.

- Treated with preservative (GLP)
- 5 Year Warranty\*
- Eco-Friendly
- More number of plies, hence more strength
- Can be compared to any other branded or local BWR ply properties

\*Check the Warranty Terms & Conditions



## TECHNICAL SPECIFICATIONS\*

### PLYWOOD

|  |  |                      |
|--|--|----------------------|
| Moisture Content (%)                         |  | 8 - 12               |
| Screw holding strength (Kgf)                 |  | > 165                |
| Nail holding strength (Kgf)                  |  | > 75                 |
| Preservative Treatment                       |  | Glue Line Protection |
| Adhesion of plies                            |  | Excellent            |
| Specific Gravity                             |  | > 0.50               |
| Static Bending Strength (N/mm <sup>2</sup> ) |  |                      |
| Modulus of rupture (MOR):                    |  |                      |
| Parallel to face grain:                      |  | > 35                 |
| Perpendicular to face grain:                 |  | > 20                 |
| Modulus of elasticity (MOE):                 |  |                      |
| Parallel to face grain:                      |  | > 4500               |
| Perpendicular to face grain:                 |  | > 2200               |

### BLOCKBOARD

|  |  |           |
|--|--|-----------|
| Moisture Content (%)                       |  | 10 - 12   |
| Adhesion of plies                          |  | Excellent |
| Specific Gravity                           |  | > 0.50    |
| Screw holding strength (Kgf)               |  | > 100     |
| Nail holding strength (Kgf)                |  | > 50      |
| Modulus of Elasticity (N\mm <sup>2</sup> ) |  | > 5000    |
| Modulus of Rupture (N\mm <sup>2</sup> )    |  | > 40      |

\*Conditions apply

# LOCAL PLY SE DHOKA MAT KHAIYE, GHAR LAIYE.

# SAINIK 710

by  CENTURYPLY®

## ASLI WATERPROOF PLY

 LOCAL PLY

 SAINIK 710



**BOILING  
WATER PROOF**

**BORER AND  
TERMITE PROOF**

**8 YEAR  
WARRANTY**

**Sainik 710**, is produced from rotary-cut, smooth veneers, sourced from specially selected eco-friendly timber.

- Bend resistant
- Accordance to IS:710
- Chemically treated for borer and termite proof
- More durable & cost effective
- 8-Year Warranty\*
- GLP
- Green Building certified
- A unique and first in class one India one price product
- CenturyPly in house manufactured product

\*Check the Warranty Terms & Conditions



**8 YEAR**  
WARRANTY

## TECHNICAL SPECIFICATIONS\*

### PLYWOOD

|   |  |  |
|---|--|--|
| Moisture Content (%)  |  | 8 - 12   |
| Adhesion of Plies (Water Resistant)                                   |  | Excellent  |
| Preservative Treatment  |  | Two Tier Treatment:<br>1. Glue Line Protection<br>2. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Specific Gravity  |  | > 0.560  |
| Water Absorption (%)  |  | < 5  |
| Screw holding strength (Kgf)  |  | > 150  |
| Nail holding strength (Kgf)   |  | > 85   |
| Static Bending Strength (N/mm <sup>2</sup> )                          |  |  |
| Modulus of rupture (MOR):<br>Along the grain:<br>Across the grain:    |  | > 48<br>> 35   |
| Modulus of elasticity (MOE):<br>Along the grain:<br>Across the grain: |  | > 4800<br>> 2300   |

### BLOCKBOARD

|  |  |  |
|--|--|--|
| Moisture Content (%)                       |  | 10 - 12  |
| Adhesion of plies                          |  | Excellent  |
| Preservative Treatment                     |  | Three Tier Treatment:<br>1. Treated fillers<br>2. Glue Line Protection<br>3. Finished panels are treated with ACC (Acid Copperchrome Compound) |
| Specific Gravity                           |  | > 0.50   |
| Screw holding strength (Kgf)               |  | > 125  |
| Nail holding strength (Kgf)                |  | > 65   |
| Modulus of Elasticity (N\mm <sup>2</sup> ) |  | > 5100   |
| Modulus of Rupture (N\mm <sup>2</sup> )    |  | > 52   |

\*Conditions apply

# SAINIK MR

READY FOR THE  
TOUGHEST CHALLENGES.



CENTURY PLYBOARDS (INDIA) LTD.



WATER RESISTANT PLY

by  **CENTURYPLY**<sup>®</sup>



Sainik MR, a commercial plywood from the house of CenturyPly. Sainik MR is dimensionally stable with lesser susceptibility to weather variance.

- Bend Resistant
- Chemically treated for borer and termite resistance
- High resistance to climatic conditions
- Bonding with Melamine Fortified Urea Formaldehyde Synthetic Adhesive
- 5-Year Warranty against borer and termite\*
- Eco-Friendly

\*Check the Warranty Terms & Conditions




**5 YEAR**  
WARRANTY


## TECHNICAL SPECIFICATIONS\*

### PLYWOOD

|                                   |  |
|-----------------------------------|--|
| Thickness available in (mm)       |  All thickness      |
| Dimensions available in (mm x mm) |  Max. 2440 x 1220 |
| Moisture Content (%)              |  10 - 14          |
| Adhesion of Plies                 |  Excellent        |
| Specific Gravity                  |  > 0.50           |
| Water Absorption (%)              |  < 5              |
| Screw holding strength (Kgf)      |  > 100            |
| Nail holding strength (Kgf)       |  > 75             |

|  |  |
|--|--|
| Static Bending Strength (N/mm <sup>2</sup> ) |  |
| Modulus of rupture (MOR):                    |  |
| Along the grain:                             |  > 35 |
| Across the grain:                            | > 20   |
| Modulus of elasticity (MOE):                 |  |
| Along the grain:                             | > 4000   |
| Across the grain:                            | > 2000   |

### BLOCKBOARD


|                              |  |
|------------------------------|--|
| Moisture Content (%)         |  10 - 14     |
| Adhesion of Plies            |  Excellent |
| Specific Gravity             |  > 0.50    |
| Screw holding strength (Kgf) |  > 90      |
| Nail holding strength (Kgf)  |  > 55      |

\*Conditions apply



**CENTURYPLY®**  
**FILM FACE PLYWOOD**

# THE SMART BUILDER'S CHOICE

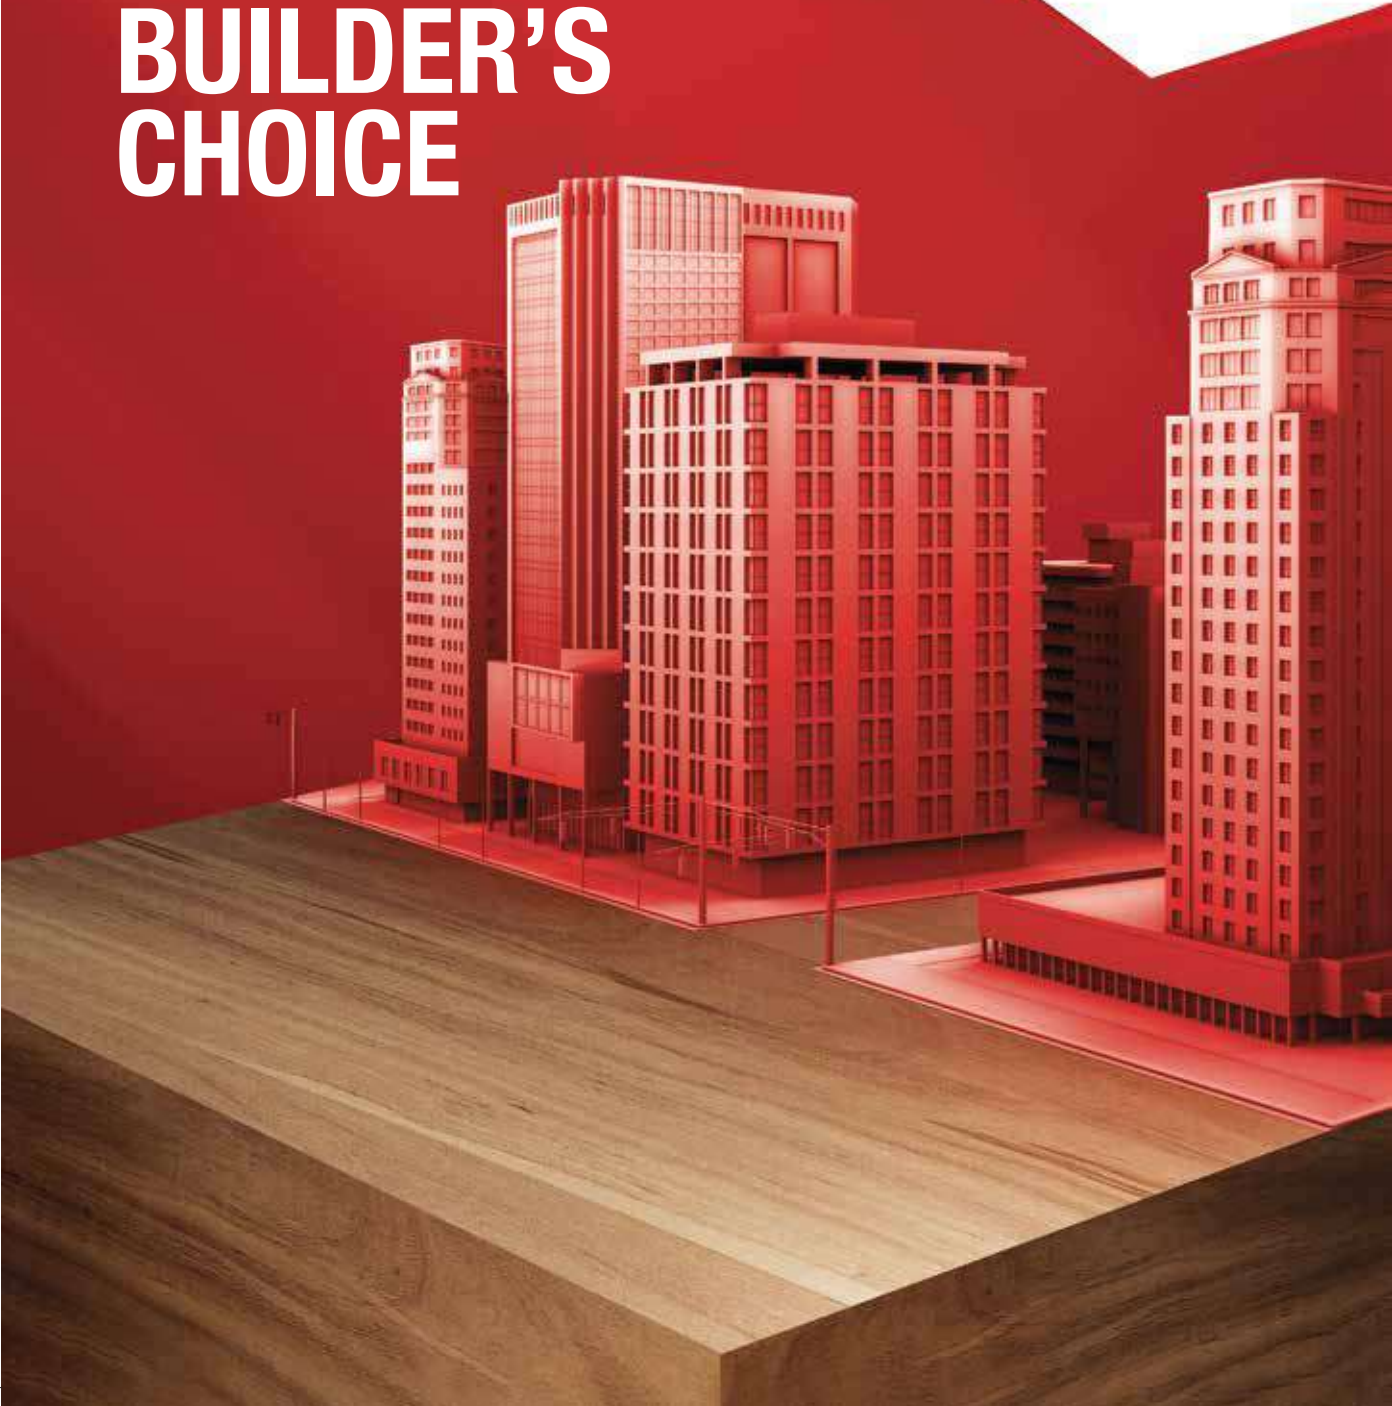

CenturyPly Film Face Shuttering Plywood is every contractor's final choice. It's a BWP (Boiling Water Proof) grade, powder-proof ply that is especially suited for use in concrete shuttering and framework. The ply withstands alternate wetting and drying conditions. The solid surface of the plywood neither buckles under a load nor get disturbed by vibrations caused at the time of construction.

- BWP Grade Plywood
- Use of Phenol Formaldehyde adhesive for bonding of veneers
- Bend resistant
- More number of plies, hence more strength
- Chemically treated for borer and termite resistance
- High resistance to climatic conditions
- Made from specially treated eco-friendly timber
- Sides are protected with water-resistant sealant



### TECHNICAL SPECIFICATIONS\*

|                        | FF30     | FF34     |
|------------------------|----------|----------|
| Weight (Kg)            | 30       | 34       |
| No. of Layers          | 10       | 11       |
| Timber                 | Hardwood | Hardwood |
| Thickness              | +/- 5%   | +/- 5%   |
| GSM Paper              | 120      | 450      |
| Density (Kg/M2)        | 800-850  | 900-950  |
| Grade                  | BWP      | BWP      |
| Confirmed Repetitions* | 20       | 30       |

\*Under ideal test conditions





# **DUPLICATE SE RAHO BEFIKAR**

All Century Plyboards now come with unique QR codes. You can verify its authenticity by scanning the QR code using your CenturyPromise App.



Just tap on our app



Scan the QR Code and check authenticity of the products





Download e-Warranty, check offers & promotions and give your feedback



LUXURY PRODUCT

**ARCHITECT PLY**  
TRULY EVERLASTING

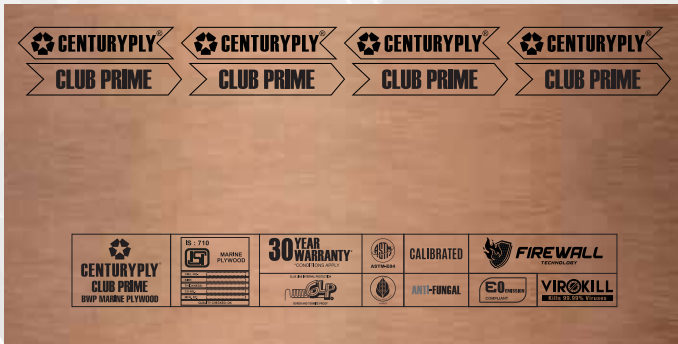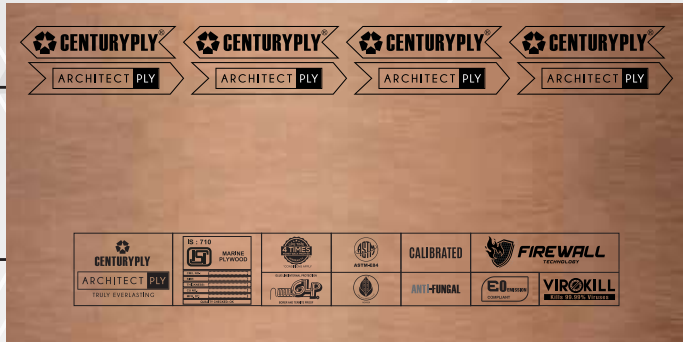

PREMIUM PRODUCT

**CENTURYPLY**  
**CLUB PRIME**

PREMIUM ECONOMY

**CENTURYPLY**  
**CLASSIC MARINE**







VALUE PRODUCT



VALUE PRODUCT



## BRANCH ADDRESSES

### EAST ZONE

- Kolkata** Century Plyboards (India) Ltd.  
6 Lyons Range, Kolkata 700001
- Bhubaneswar** Century Plyboards (India) Ltd.  
Plot No: 40 & 41 , Narayani Moters Lane, Rasulgarh, Bhubaneswar 751010
- Patna** Century Plyboards (India) Ltd.  
Ground Floor, Shivkunj Apartment, Behind Chandi Vyapar Bhawan, Exhibition Road,  
Patna 800001
- Ranchi** Century Plyboards (India) Ltd.  
Mahadev Path, DAV School Road, Near Kathalmore, Post-Lalghutwa, Ranchi 834005
- Guwahati** Century Plyboards (India) Ltd.  
House No. 24, Piyali Phukan Road, Rehabari, Guwahati 781008
- 

### WEST ZONE

- Pune** Century Plyboards (India) Ltd.  
Winners Courts, Office No. 402, 4th Floor, Above ZK's Restaurant,  
Lulla Nagar Chowk, Pune 411040
- Nagpur** Century Plyboards (India) Ltd.  
C/o Dr. K.S. Yawalkar, 2 nd Floor, Above Vodafone Gallery,  
52, Bajaj Nagar, Nagpur 440010
- Ahmedabad** Century Plyboards (India) Ltd.  
1006 - 1009, Sakar - III, 10th Floor, Nr. Income Tax Circle, Ahmedabad 380014
- Surat** Century Plyboards (India) Ltd.  
3rd Floor, 305- Royal Trade Centre, Opp. Star Bazaar, Adajan, Surat 395009
- Mumbai** Century Plyboards (India) Ltd.  
15th Floor Range Heights, opp Kaju Pada Bus Stop, Behram Baug, Jogeshwari West, Mumbai  
400102

## **SOUTH ZONE**

|                   |  |
|-------------------|--|
| <b>Bangalore</b>  | Century Plyboards (India) Ltd.<br>No. 92, 3rd floor, HJS Chambers, Richmond Road, Bangalore 560053   |
| <b>Hyderabad</b>  | Century Plyboards (India) Ltd.<br>405A, 4th Floor, Minverva Commercial Complex, S.D. Road Secunderabad 500003  |
| <b>Vijayawada</b> | Century Plyboards (India) Ltd.<br>Survey no. 156/1A, Kothuru Village, Tadepalli Gramapanchayati Area,<br>Vijayawada Rural Mandal, Krishna District, Andhrapradesh 521228 |
| <b>Kochi</b>      | Century Plyboards (India) Ltd.<br>24 B, Ground Floor, Alakalathil Building, Marottichuvadu, Edappally PO, Kochi 682004   |
| <b>Coimbatore</b> | Century Plyboards (India) Ltd.<br>S.F no. 396/1B, 8/30, Jayasudhaa Warehouse, Ayyan Thottam, G.N.Mills Post,<br>Coimbatore 641029  |
| <b>Madurai</b>    | Century Plyboards (India) Ltd.<br>#67, Madurai Mandapam Main Road, Irravathanallur, Madurai 625009   |
| <b>Chennai</b>    | Century Plyboards (India) Ltd.<br>2/1, Sattana Naicken Street, Inside Nehru Timber, Choolai, Chennai 600112  |
| <b>Hubli</b>      | Praveen Yaligaar - 8884546987, Hubli 580031  |

---

## **NORTH ZONE**

|                  |  |
|------------------|--|
| <b>Indore</b>    | Century Plyboards (India) Ltd.<br>AA/11, "Papalal Tower", Scheme no 54, Satya Sai squire, A.B. road Indore (MP) 452010             |
| <b>Ludhiana</b>  | Century Plyboards (India) Ltd.<br>Shop No. 58, 1st Floor, New Grain Market, Gill Road, Ludhiana, Punjab 141003                     |
| <b>Jaipur</b>    | Century Plyboards (India) Ltd.<br>E-52, Road No. 4, Behind V.K.I. Police Station, V.K.I. Area, Jaipur 302013                       |
| <b>Lucknow</b>   | Century Plyboards (India) Ltd.<br>E-1/139, Phase -2, Opp.Parking No. 07, Transport Nagar 226012, Lucknow 226012                    |
| <b>Ghaziabad</b> | Century Plyboards (India) Ltd.<br>C-21, First Floor, Meerut Road, Industrial Area Near DPS School Ghaziabad, 201003 (UP)           |
| <b>Delhi</b>     | Century Plyboards (India) Ltd.<br>Room No: 203, II Floor, Rajnigandha Building, 5/2 D.B Gupta Road, Paharganj,<br>New Delhi 110055 |
| <b>Gurgaon</b>   | Century Plyboards (India) Ltd.<br>16 A, 16 B, First Floor, Vyapar Kendra Market, Sushant Lok Phase 1, Gurgaon 122002               |







# CENTURYPLY<sup>®</sup>

CORPORATE OFFICE

Century House, P15, 1, Taratala Rd, CPT Colony,  
Taratala, Kolkata, West Bengal 700088

 +91 33 39403950

 1800-5722-122

 [customerhelpdesk@centuryply.com](mailto:customerhelpdesk@centuryply.com)

 Century Plyboards India Limited

 Century Plyboards (India) Ltd.

 Century Plyboards India Ltd

 Century Plyboards (India) Limited

 Century Plyboards (I) Limited

Retail Help Desk +91 9962891523